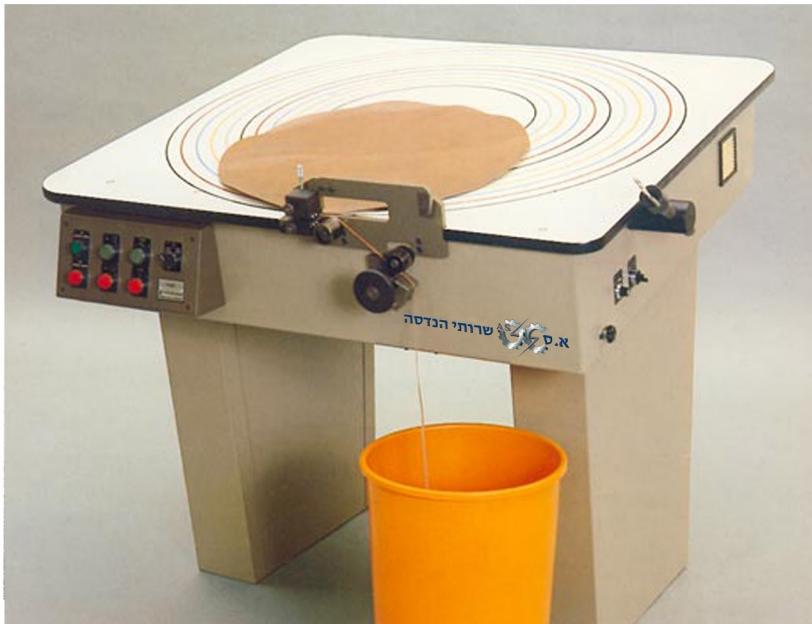


Machine for leather spiral cutting SMS Machine à couper le cuir en spirale SMS

**CHARACTERISTICS:**

Performance:
Cutting widths:
Cutting thicknesses:
Strap transport:
Seaworking packing:

High precision machine

variable speed from 10 to 140 meters/minute
2 – 2.5 – 3 – 3.5 – 4 – 5 – 6 – 7 – 8 – 10 mm
from 0.5 to 6 mm, according to the leather type
1 threephase motor 220/380V – 180W, with electronic speed control
1 case netweight: 210 kg – grossweight: 280 kg. Dimensions: 136 x 136 x 56 cm

CARACTERISTIQUES:

Performance:
Largeurs de coupe :
Epaisseurs de coupe :
Transport de la lanière :
Emballage maritime :

machine de haute précision

vitesse réglable de 10 à 140 mètres/minute
2 – 2.5 – 3 – 3.5 – 4 – 5 – 6 – 7 – 8 – 10 mm
de 0.5 à 6 mm, selon le type de cuir
1 moteur triphasé 220/380V – 180W avec contrôle électronique de la vitesse
1 caisse poids net : 210 kg – poids brut : 280 kg. Dimensions : 136 x 136 x 56 cm

This machine is cutting all kinds of hides and skins

Working description:

A skin is being placed on the machine. For the most economical cutting, it is easily centred by means of the engraved circles.

It is perforated with the tripont situated in the centre. Thereafter, the exterior edge of the skin is brought towards the knife.

By turning the skin, a circle is obtained. The exterior waste will be set aside in a container. The circle being made, the machine will begin to cut the leather into a strap in the desired width. This strap will be introduced between the transport wheels.

When starting the machine, the strap will automatically be cut further and transported to a plastic container.

After having cut all the big circles, the smaller ones will be cut from the waste in the same way.

The machine is delivered with some spare parts, maintenance tools and detailed instruction book.

Cutting table diameter: 104 cm (*)

Cutting device: industrial high-quality steel strip blades

Performance: variable speed from 10 to 140 meters/minute

Cutting widths: 2 - 2,5 - 3 - 3,5 - 4 - 5 - 6 - 7 - 8 and 10 mm, other sizes between 1,2 and 18,5 mm are available on request

Cutting thickness: from 0.5 up to 6 mm, according to the leather type

Strap transport: 1 three-phase motor 220/380V-180W-50/60Hz with electronic speed control for speed regulation and smooth starting

Optionally (*):

The machine can be delivered with a larger cutting table (150x150) to cut skins up to a diameter of 150 cm.

With the aim for continuous improvement, the specifications are subject to change without notice.

Cette machine coupe tout cuir et peausserie

Processus de travail:

Une peau est placée sur la machine. Pour la découpe la plus économique, elle est facilement centrée sur la table de travail à l'aide des cercles gravés et colorés.

Elle est ensuite perforée par le trident qui est situé au centre de la machine. Ensuite, le bord extérieur de la peau est amené vers le couteau.

En tournant la peau d'un tour, on obtiendra un cercle. Les chutes extérieures seront mises à part dans un récipient. Le cercle étant fini, la machine commencera à couper le cuir en une lanière selon la largeur choisie. Cette lanière sera introduite entre les roulettes de transport.

Dès la mise en marche, la machine continuera automatiquement à couper et à transporter la lanière vers un récipient en plastique.

Après avoir coupé tous les grands cercles, on découpera de la même façon les petits cercles des déchets.

La machine est fournie avec quelques pièces de rechange, l'outillage d'entretien et livre d'instructions détaillées.

Grandeur table de coupe: 104 cm (*)

Découpage : lame de rasoir industrielle de haute qualité

Capacité : vitesses réglables de 10 à 140 mètres/minute

Largeur de coupe : 2 - 2,5 - 3 - 3,5 - 4 - 5 - 6 - 7 - 8 et 10 mm, autres mesures entre 1,2 et 18,5 mm sont possible sur demande

Epaisseur de coupe: de 0,5 à 6 mm, selon le type du cuir

Transport: moteur triphasé universel 220/380V-180W-50/60Hz avec contrôleur de vitesse et de départ progressif électronique

Optionnelle (*) :

La machine peut être livrée avec une table plus grande donnant la possibilité de couper les peaux jusqu'à 150 cm de diamètre.

Dans le but de constante amélioration, les spécifications sont sous réserve de changements sans préavis.